

12V DC Fan speed controllers

16-pin MCU socket

PE 1	2 Reserved
+12V (output) 3	4 +12V (output)
+5V (output) 5	6 +5V (output)
Gnd 7	8 Gnd
Gnd 9	10 Reserved (+Vaux)
PWR_SSTART (input) 11	12 PWR_DIRECT (input)
SSCL (I/O) 13	14 SSDA (I/O)
FAULT (output) 15	16 +3V3 (input)

Connector for 3- or 4-pin DC 12V Fan

- Fan- (Black) 1
- Fan+ (Yellow or Red) 2
- Fan sense (Green or Yellow) 3
- Fan control (Blue) 4

AC input protection, soft-start/standby, Fan controller with LDO

TITLE: EEZ DIB AUX PS r3B3

Document Number:

REV:


Date: 11.3.2020. 10:30

Sheet: 1/2




HR000002
Licensed under the TAPR Open Hardware License (www.tapr.org/OHL)
More info at <http://www.envox.hr/eez>
Repository: <https://github.com/eez-open>

Bias power supply

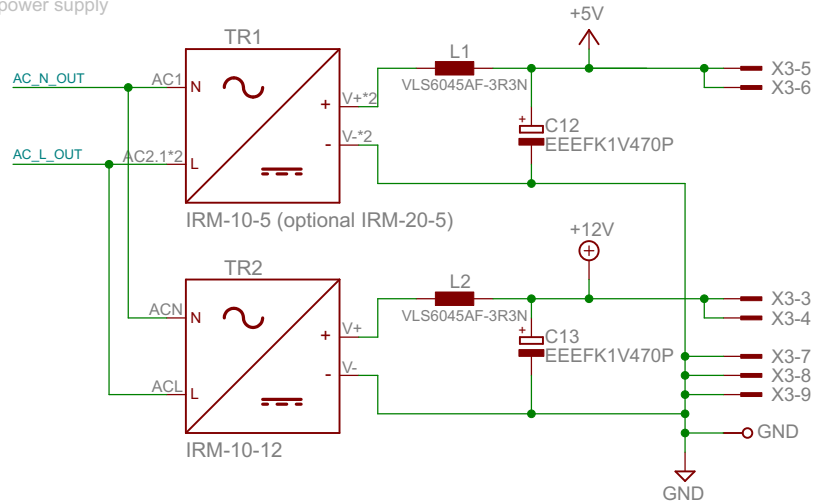

Standby mode indication

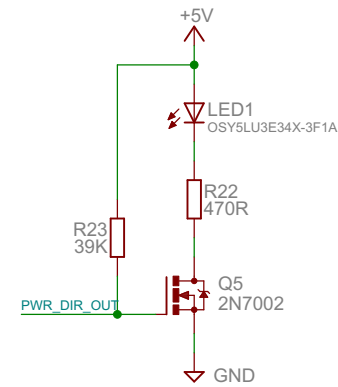

Mean Well +5 V and +12 V AC/DC modules
Standby indicator

TITLE: EEZ DIB AUX PS r3B3

Document Number:

REV:

Date: 11.3.2020. 10:30

Sheet: 2/2